

8 7 6 5 4 3 2 1


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	C	INITIAL RELEASE	1/8/2013	BS
	D	CORRECTED "CCD" SIDE, LEAK TEST WAS 10^{-7} , & FIBER DESCRIPTION WAS "309/125/145"	1/9/2013	BS

D

C

B

A

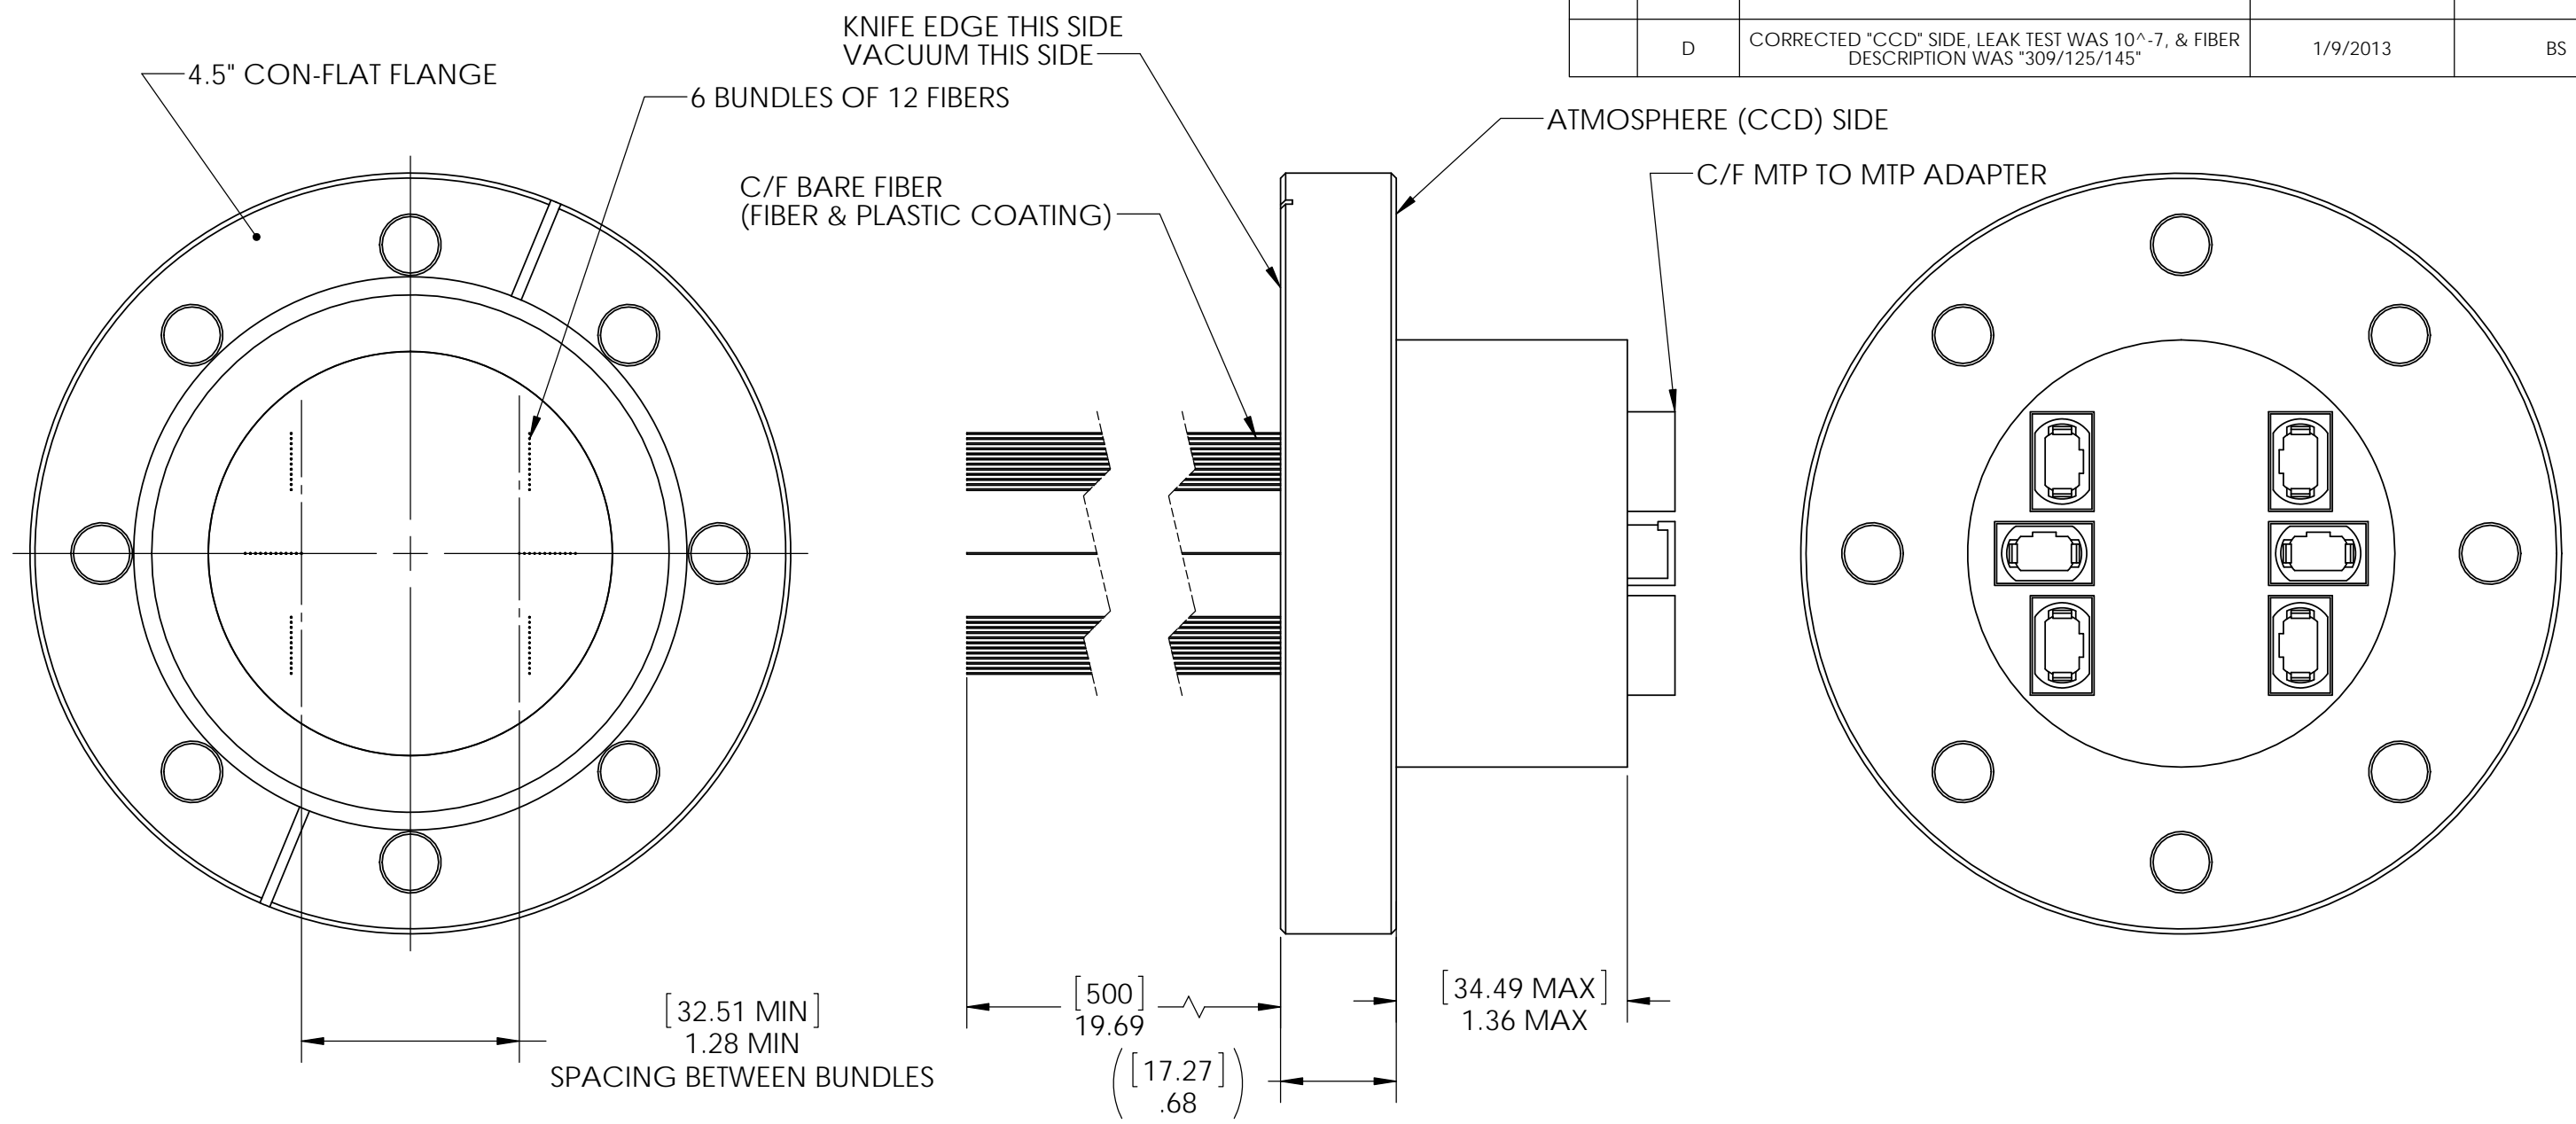

- NOTES:
1. HELIUM LEAK TEST 1×10^{-8} STD-CC/SEC OR BETTER, VACUUM ON RETAINING RING SIDE.
 2. OPTICAL TEST - VISUAL OPTICAL TEST OF FIBER OPTIC.
 3. SEAL OPERATING TEMPERATURE -40C TO 125C.
 4. DIMENSIONS ARE INCHES [MILLIMETERS], MILLIMETERS SHOWN FOR REFERENCE ONLY.
 5. CUSTOM SIZES, WIRE OR FIBER OPTIC CONFIGURATIONS, & TESTS AVAILABLE, PLEASE CONTACT RHS FOR MORE INFORMATION.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	<p>RELIABLE HERMETIC SEALS Jersey City, NJ, USA 888-747-3250</p>
DIMENSIONS ARE IN INCHES	DRAWN	MM	1/08/13	
TOLERANCES:	CHECKED	BS	1/08/13	
FRACTIONAL $\pm 1/16$	ENG APPR.	MM	1/08/13	
ANGULAR $\pm .5$	MFG APPR.			
X. ± 1 .X ± 1	Q.A.			TITLE:
.XX $\pm .02$.XXX $\pm .005$	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RELIABLE HERMETIC SEALS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF RELIABLE HERMETIC SEALS IS PROHIBITED.			FIBER SEAL CF4.5 (72) C/F FUJIKURA 6.8/125/245 FIBER MTP-0.5M
INTERPRET GEOMETRIC TOLERANCING PER:	SIZE	DWG. NO.	REV	
MATERIAL	B	70017	D	
FINISH	SCALE: 1:1	WEIGHT:	SHEET 1 OF 1	
DO NOT SCALE DRAWING				

8 7 6 5 4 3 2 1