


Inner Shield	1	1
Shield	14	14
Pair 1	2	25
	15	12
Pair 2	3	24
	16	11
Pair 3	4	23
	17	10
Pair 4	5	22
	18	9
Pair 5	6	21
	19	8
Pair 6	7	20
	20	7
Pair 7	8	19
	21	6
Pair 8	9	18
	22	5
Pair 9	10	17
	23	4
Pair 10	11	16
	24	3
Pair 11	12	15
	25	2
Inner Shield	13	13
Shield	26	26

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	16APR2018	BS

2-140 VITON O-RING

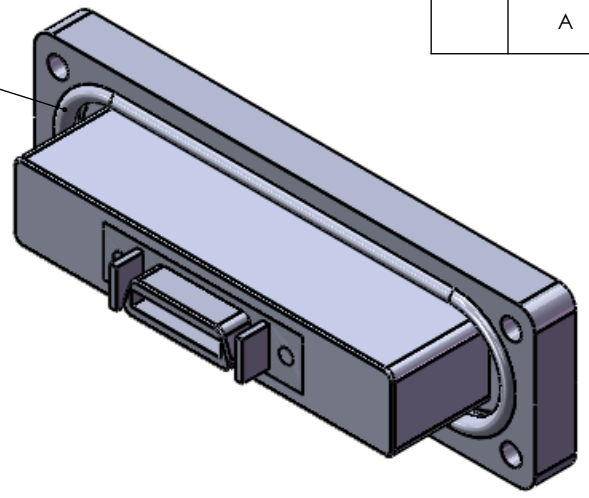

D

D

C




C

B

B

A

A

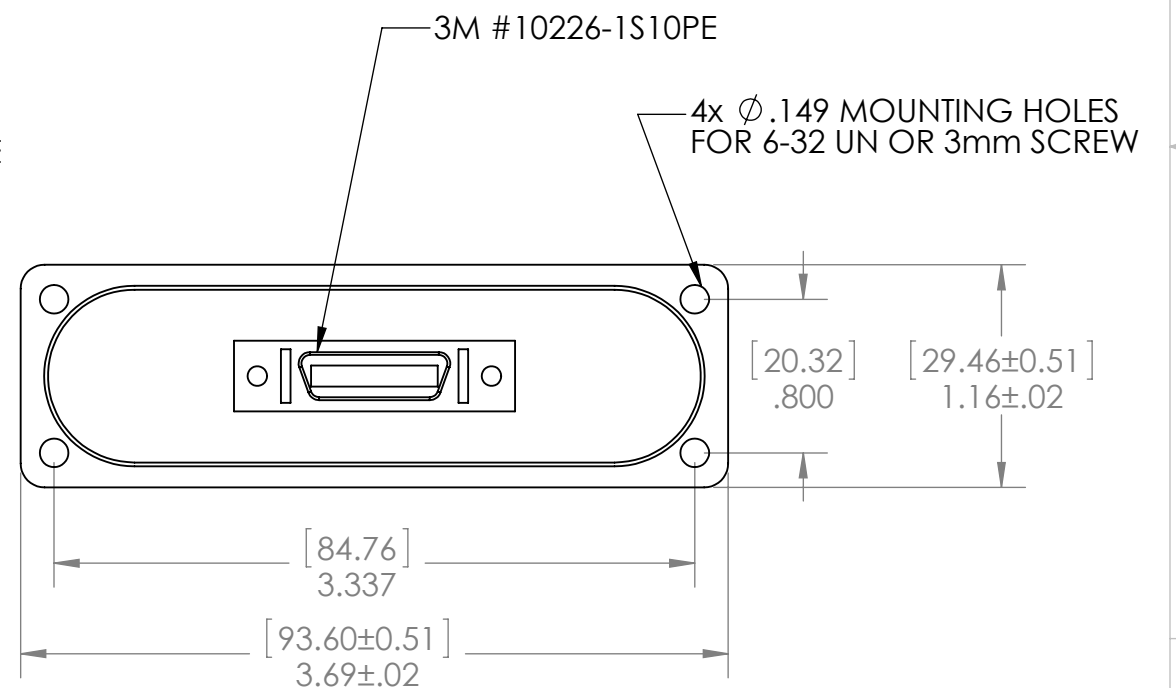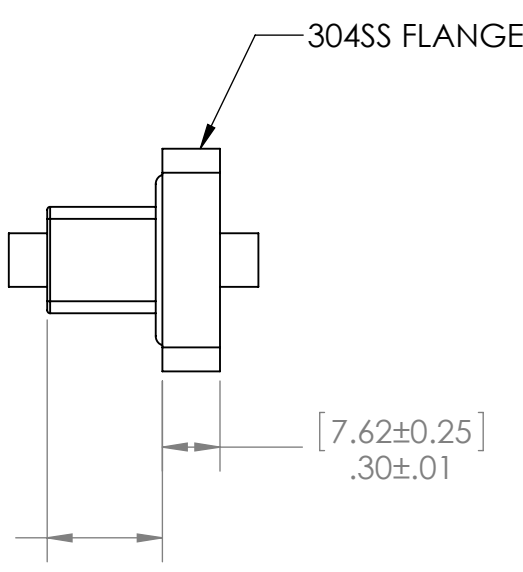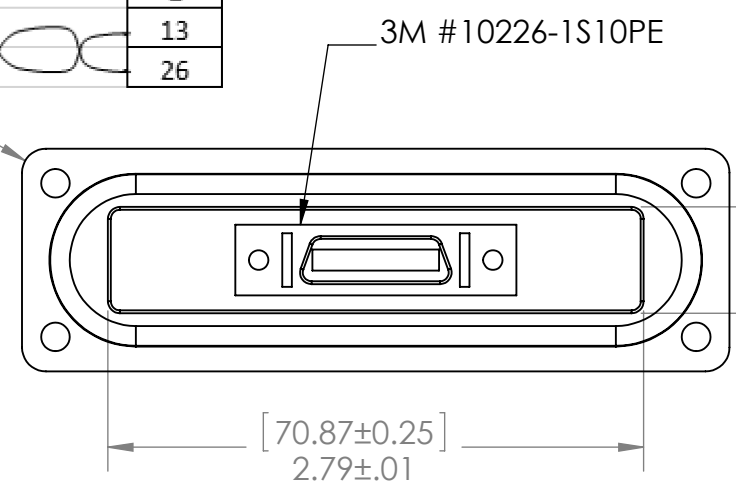

- NOTES:
1. HELIUM LEAK TEST @ 1 ATM 1X10⁻⁸ STD-CC/SEC OR BETTER, VACUUM ON O-RING SIDE.
 2. HYPOT 500VDC 500 MEGOHMS .01 SECOND MINIMUM.
 3. SEAL OPERATING TEMPERATURE -40C TO 130C.
 4. SEE DRAWING CCSDxxF (25 PIN) FOR BULKHEAD CUTOUT.
 5. DIMENSIONS ARE INCHES [MILLIMETERS], MILLIMETERS SHOWN FOR REFERENCE ONLY.
 6. CUSTOM SIZES, WIRE OR FIBER OPTIC CONFIGURATIONS, & TESTS AVAILABLE, PLEASE CONTACT RHS FOR MORE INFORMATION.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES		DRAWN	MM 16APR2018
TOLERANCES:		CHECKED	BS 16APR2018
FRACTIONAL ±1/16		ENG APPR.	MM 16APR2018
ANGULAR ±.5		MFG APPR.	
X. ±1 .X ±.1		Q.A.	
.XX ±.02 .XXX ±.005		PROPRIETARY AND CONFIDENTIAL	
INTERPRET GEOMETRIC TOLERANCING PER:		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RELIABLE HERMETIC SEALS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF RELIABLE HERMETIC SEALS IS PROHIBITED.	
MATERIAL SEE ABOVE		SIZE	DWG. NO.
FINISH		B	80171
DO NOT SCALE DRAWING		SCALE: 1:1	WEIGHT:

rhs
RELIABLE HERMETIC SEALS
 Jersey City, NJ, USA 888-747-3250

TITLE:
CONNECTOR SEAL FL5919 MDR26

REV
A

SHEET 1 OF 1