



REVISIONS

ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	08Jun2022	MN

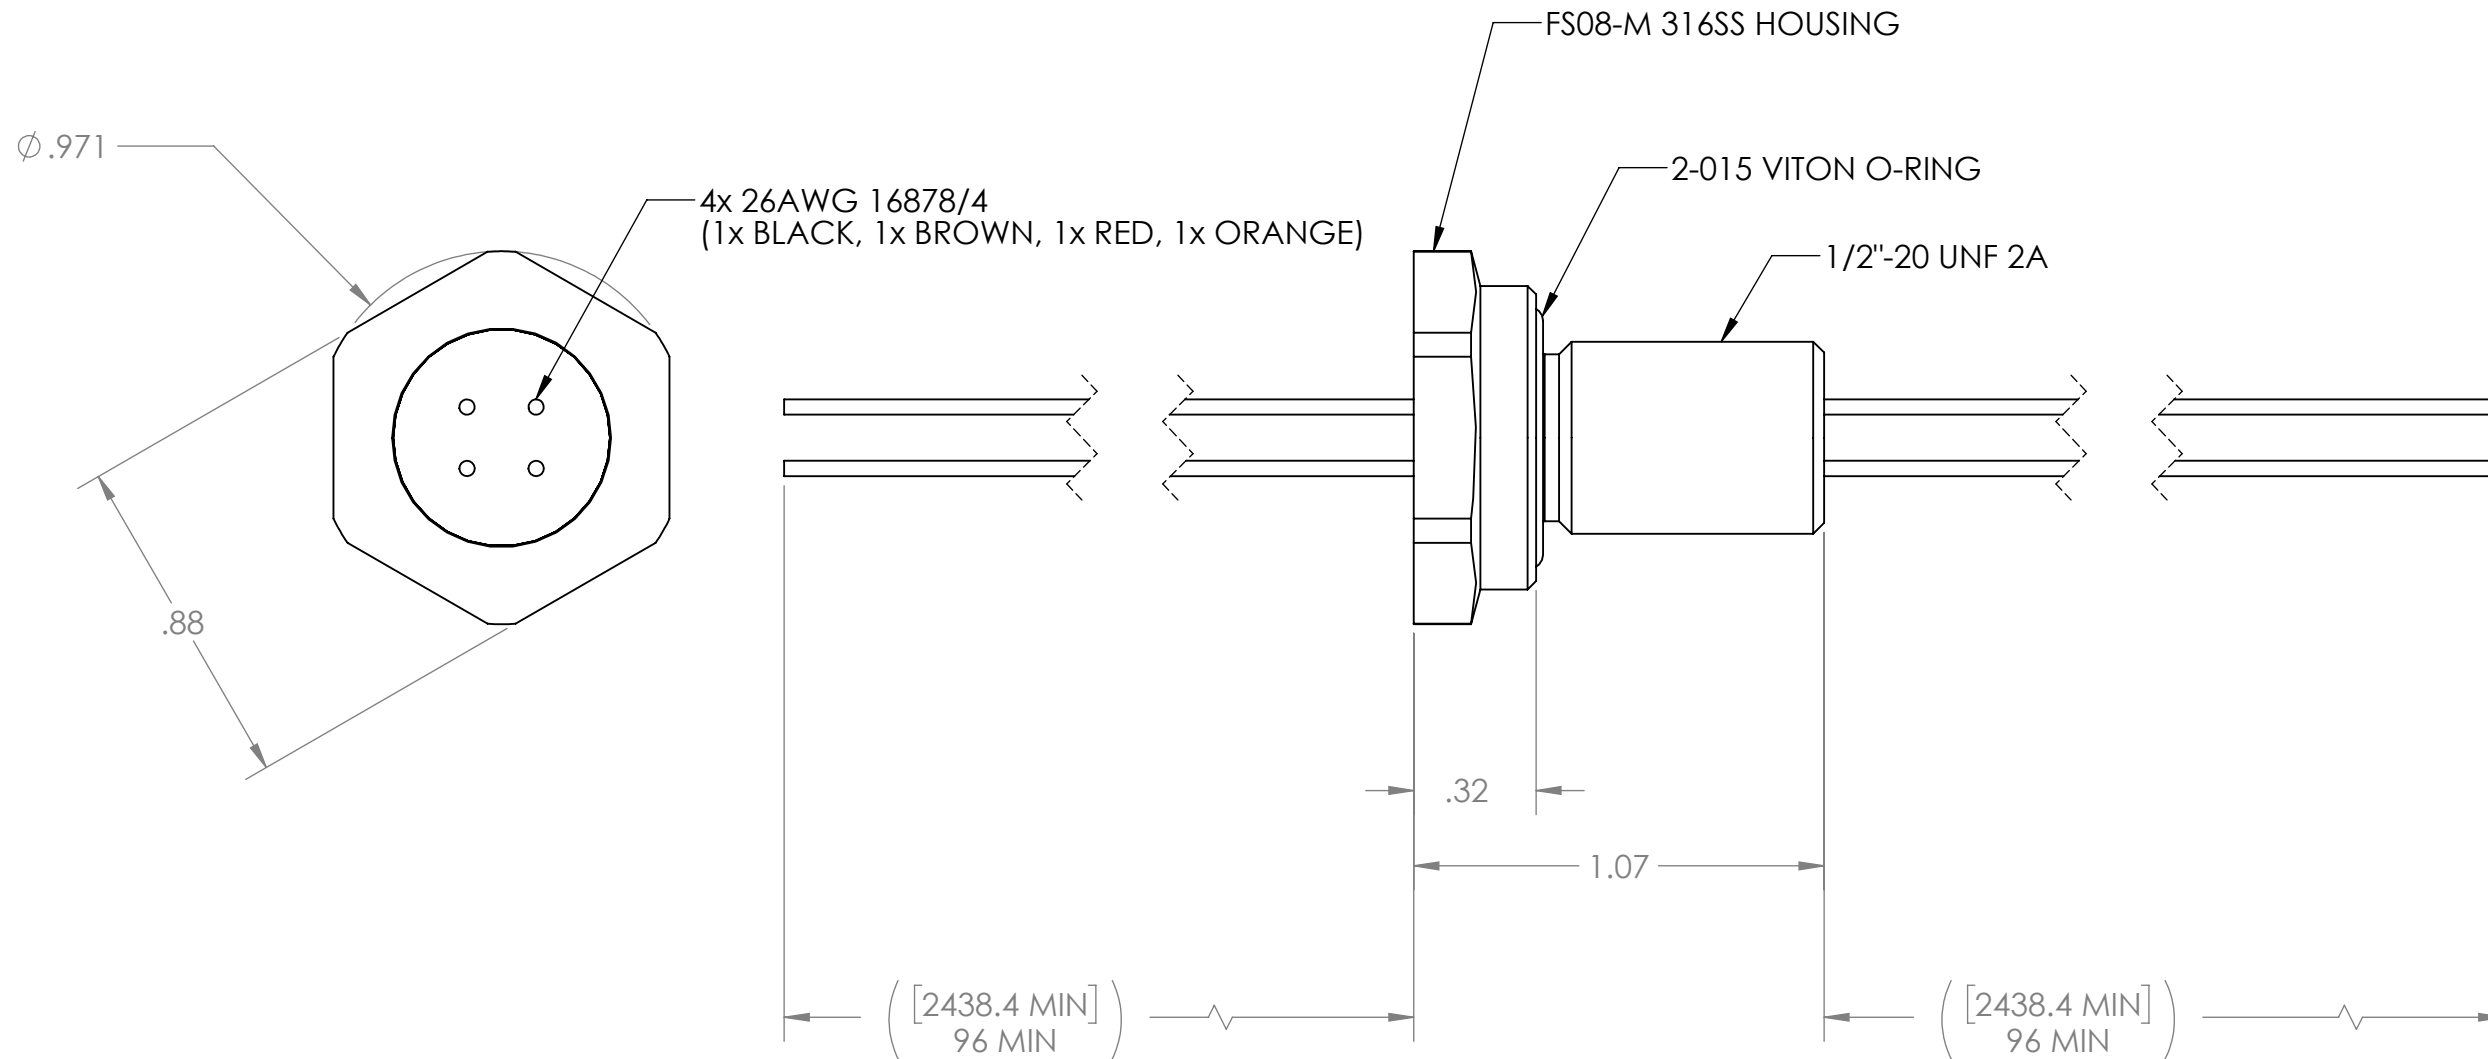

- NOTES:
1. HELIUM LEAK TEST 1X10<sup>-8</sup> STD-CC/SEC OR BETTER.
  2. HIPOT 500VDC 500 MEGOHMS 1 SECOND MINIMUM.
  3. SEAL OPERATING TEMPERATURE -20C TO 130C.
  4. DIMENSIONS ARE INCHES [MILLIMETERS], MILLIMETERS SHOWN FOR REFERENCE ONLY.
  5. CUSTOM SIZES, WIRE OR FIBER OPTIC CONFIGURATIONS, & TESTS AVAILABLE, PLEASE CONTACT RHS FOR MORE INFORMATION.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	 <p><b>RHSeals</b> RELIABLE HERMETIC SEALS</p>
DIMENSIONS ARE IN INCHES	DRAWN	KS	08Jun2022	
TOLERANCES:	CHECKED			
FRACTIONAL ±1/16	ENG APPR.	MN	08Jun2022	
ANGULAR ±.5	MFG APPR.			
X. ±1 .X ±.1	Q.A.			TITLE: CABLE SEAL 1/2 FS08M 316SS (4)26AWG 16878/4 96-96
.XX ±.02 .XXX ±.005	<b>PROPRIETARY AND CONFIDENTIAL</b> THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RELIABLE HERMETIC SEALS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF RELIABLE HERMETIC SEALS IS PROHIBITED.			SIZE <b>B</b>
INTERPRET GEOMETRIC TOLERANCING PER:				DWG. NO. <b>60830</b>
MATERIAL SEE ABOVE				REV <b>A</b>
FINISH N/A				SCALE: 2:1
DO NOT SCALE DRAWING				WEIGHT:
				SHEET 1 OF 1