


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	13Jun2022	MN

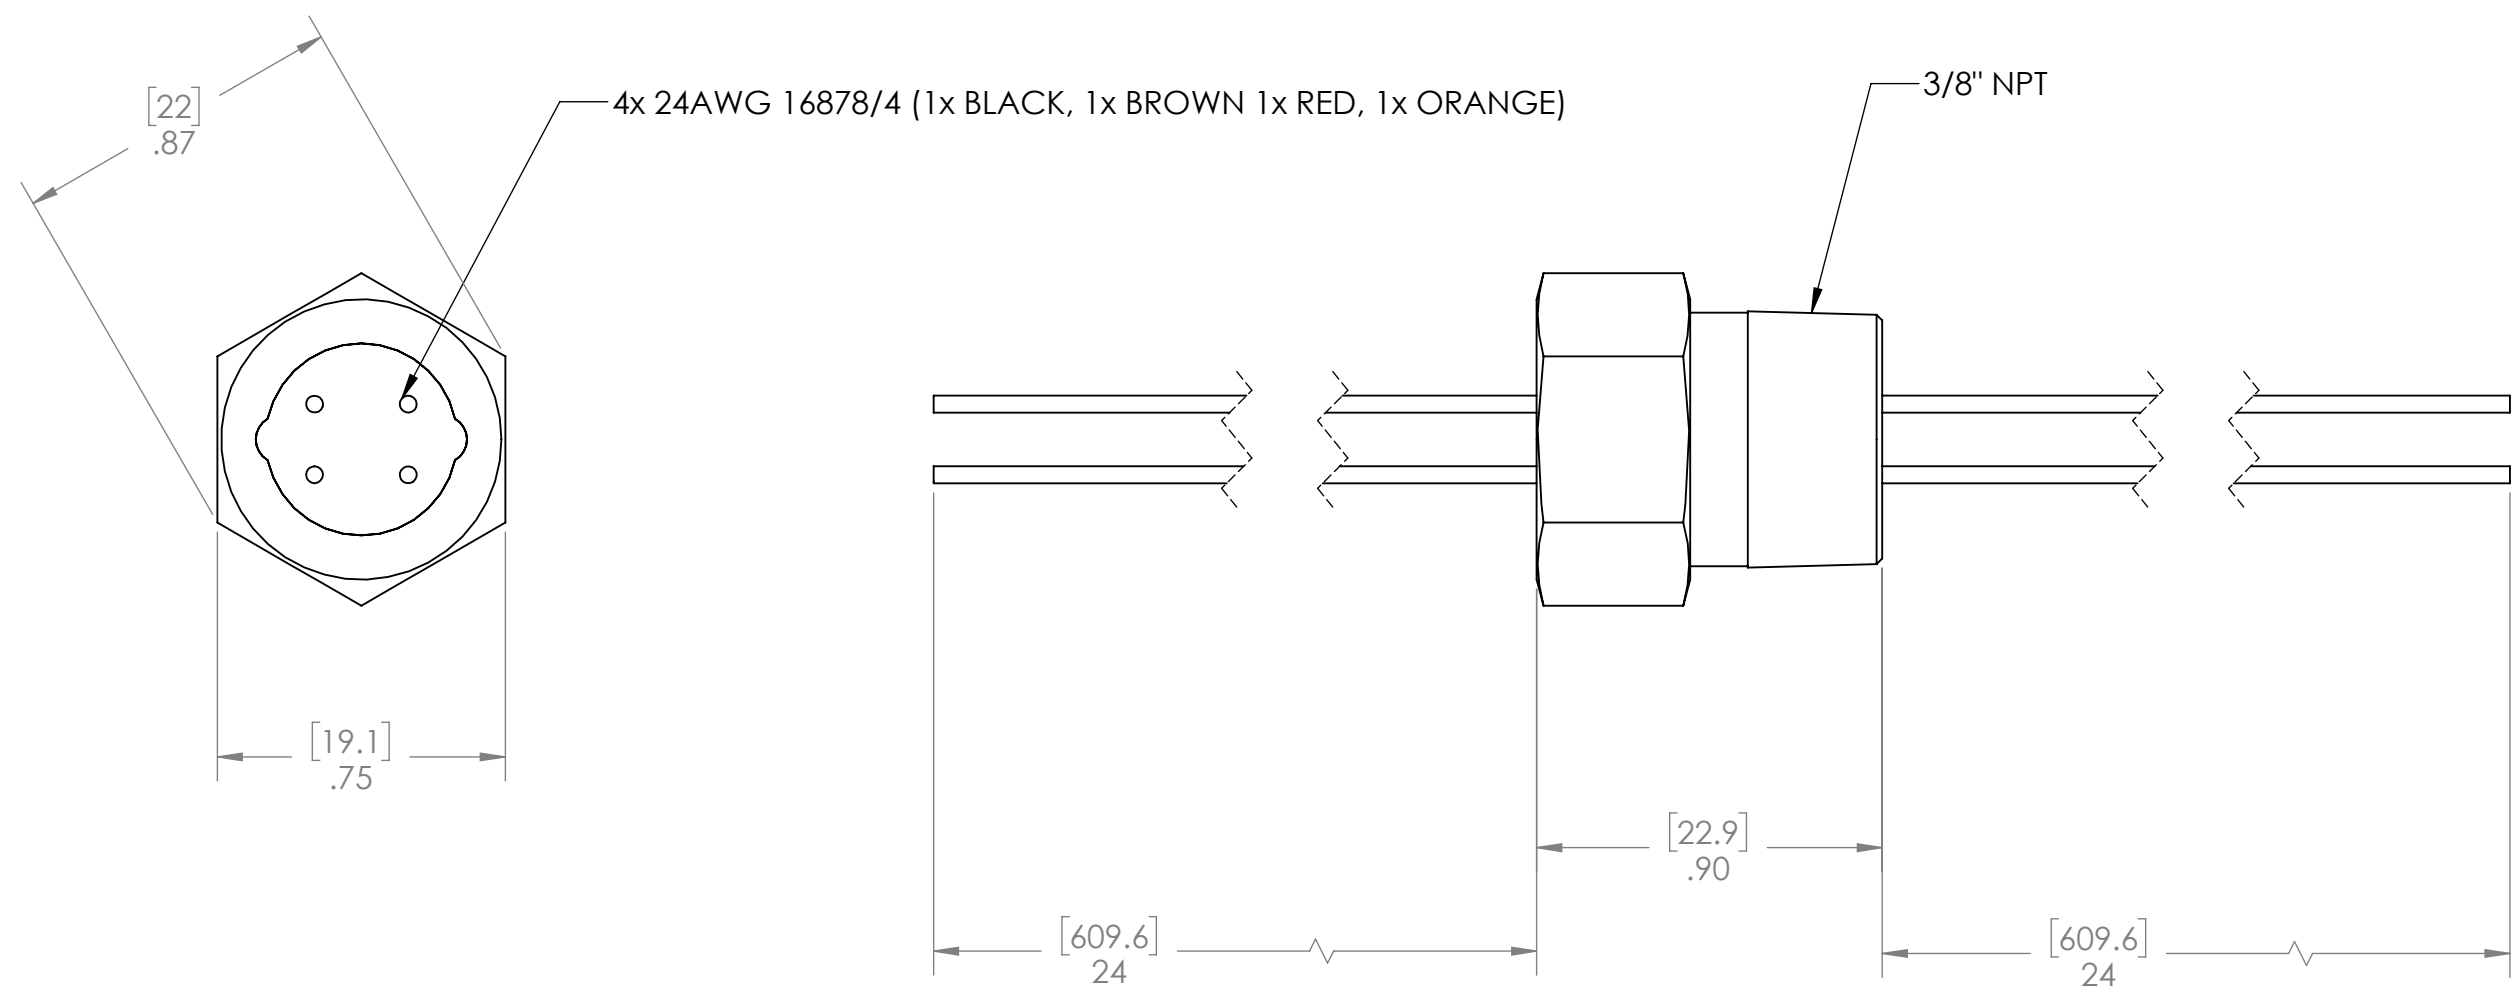

- NOTES:
1. PRESSURE LEAK TEST 150 PSI THREAD SIDE. NO BUBBLES 3 MINUTES.
 2. HIPOT 500VDC 500 MEGOHMS 1 SECOND MINIMUM.
 3. SEAL OPERATING TEMPERATURE -20C TO 130C.
 4. DIMENSIONS ARE INCHES [MILLIMETERS], MILLIMETERS SHOWN FOR REFERENCE ONLY.
 5. CUSTOM SIZES, WIRE OR FIBER OPTIC CONFIGURATIONS, & TESTS AVAILABLE, PLEASE CONTACT RHS FOR MORE INFORMATION.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES		DRAWN	KS 13Jun2022
TOLERANCES:		CHECKED	
FRACTIONAL ±1/16		ENG APPR.	MN 13Jun2022
ANGULAR ±.5		MFG APPR.	
X. ±1 .X ±.1		Q.A.	
.XX ±.02 .XXX ±.005		PROPRIETARY AND CONFIDENTIAL	
INTERPRET GEOMETRIC TOLERANCING PER:		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RELIABLE HERMETIC SEALS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF RELIABLE HERMETIC SEALS IS PROHIBITED.	
MATERIAL NOTED		SIZE	DWG. NO.
FINISH		B	60909
DO NOT SCALE DRAWING		REV	A

RHSeals
RELIABLE HERMETIC SEALS

TITLE: CABLE SEAL 3/8" PT6 SS (4) 24 AWG 16878/4 24-24

SCALE: 2:1 WEIGHT: SHEET 1 OF 1